

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 113 530 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
04.07.2001 Bulletin 2001/27

(51) Int Cl.7: H01R 12/18

(21) Application number: 00128102.1

(22) Date of filing: 21.12.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Salamone, Joseph R.  
Contoocook, New Hampshire 03229 (US)  
• Letourneau, Guy L.  
Warren, Oregon 97053 (US)

(30) Priority: 29.12.1999 US 474818


(74) Representative: Beetz & Partner Patentanwälte  
Steinsdorfstrasse 10  
80538 München (DE)

(71) Applicant: BERG ELECTRONICS  
MANUFACTURING B.V.  
5202 CB s'-Hertogenbosch (NL)

(54) High speed card edge connectors

(57) A card edge connector includes an elongated longitudinally extending outer frame (36) defining a reception region (38) adapted to receive a plurality of chiclet modules (40, 40A) including contact members (34) and lying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with mating contacts (22). Each chiclet module (40, 40A) includes an insulative housing (54) having first and second spaced generally parallel elongated passages therein and a card receiving recess (60) for reception therein between the first and second passages (58, 58A) of a planar card (28, 28A) having opposed surfaces (30, 32) with conductive contact members (34) thereon. First and second contacts (62, 66) are received, respectively, in the first and second passages (58, 58A). Each has a first contact surface (64) positioned, respectively, for engagement with first and second of the mating contacts (22). The card receiving recesses (60) of the chiclet modules (40, 40A) as a group define a longitudinally extending card receiving slot (70). The contacts each include a second contact surface (68) projecting into the card receiving slot (70) for engagement, respectively, with second conductive contact members (34) on the planar card (28, 28A). A tubular ground shield (128) may be slidably received on the insulative housing (54) in proximate engagement with its outer peripheral surface (82). In this instance, the ground-shield includes a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66) and a second integral ground contact (88) for engagement with a ground contact surface (90) on the pla-

nar card (28, 28A) inserted into the card receiving slot (70).

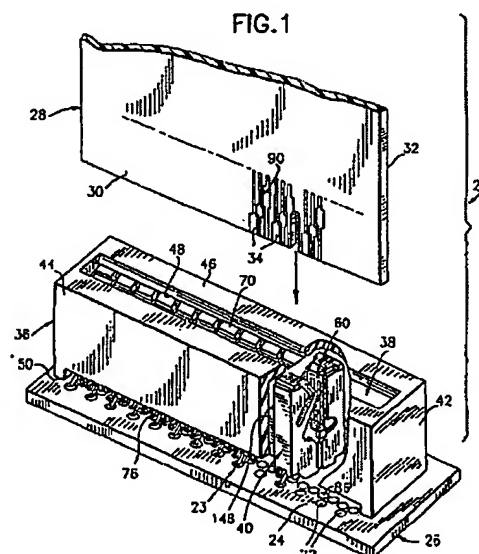

EP 1 113 530 A2

## Description

### 1. Field of the Invention

[0001] The present invention relates to modular electrical connectors and, more particularly, to card edge connectors with shielded modular inserts.

### 2. Discussion of Earlier Developments

[0002] There is a plethora today of known constructions of multiple contact electrical connectors providing a variety of features including some form of modular construction and signal shielding. A few of the more pertinent patented constructions known to the applicants will now be briefly described.

[0003] U.S. Patents, No. 4,067,637 to Narozny, No. 4,324,451 to Ammon et al. and 4,530,561 to Tyree et al. are generally descriptive of currently used card edge connectors.

[0004] U.S. Patent No. 4,550,959 to Grabbe et al. discloses an expandable, modular card edge connector in which individual elements are unified into a longitudinal whole by melting an interfacing material between adjoining sections. Withdrawal of the heat source results in a generally rigid assembly.

[0005] U.S. Patent No. 4,586,254 to Ammon et al. discloses a modular printed circuit card edge connector in which two end bodies engage opposite ends of a single insulator body which contains the entire population of contacts. It is intended to be manufactured in a generally long bar, or by a continuous molding process, to provide for cutting to length a single, unitary housing component containing the desired number of contact arrays.

[0006] U.S. Patents, No. 5,013,263 to Gordon et al. and No. 5,584,728, both disclose an electrical connector built up of interlocking modules. Specifically, the connector structures have conversely shaped interlocking parts at their ends to interlock end-to-end with similar structures to form a substantially self-supporting structure that can have any desired number of contacts, each spaced an integral multiple of the same unit distance from all of the contacts on all of the modules.

[0007] U.S. Patent No. 5,104,341 to Gilissen et al. discloses an electrical connector mountable to a printed circuit board which includes a plurality of insulated housings. The housings accept a plurality of terminal sub-assemblies into which a plurality of electrical terminals are integrally molded. Shield members are insertable into the rear of the connector housing to shield adjacent vertical rows of terminals from cross talk.

[0008] U.S. Patent No. 5,704,793 to Stokoe et al. discloses an electrical connector which is scalable in its engagement widths, but not by means of combinations of contact modules. The scalable components of this invention are contained within a longitudinal latching and clamping mechanism. This invention uses a single and discrete membrane such as a flex circuit, which must be

clamped on to the card edge pattern by the latching and clamping mechanism.

[0009] U.S. Patent No. 5,716,237 to Conorch et al. discloses an electrical connector which compensates from near-end cross talk at its mating section with near-end cross talk of an opposite polarity and essentially equal magnitude. Conductive plates connected to the conductors of the connector provide capacitive coupling unbalance between the adjacent pairs of conductors to produce the necessary opposite polarity, equal magnitude, near-end cross talk.

### SUMMARY OF THE INVENTION

[0010] The present invention relates, generally, to a card edge connector which includes an elongated longitudinally extending outer frame defining a reception region. The electrical connector is adapted to receive a plurality of chiclet modules including contact members lying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with mating contacts. Each chiclet module includes an insulative housing having first and second spaced generally parallel elongated passages therein and a card receiving recess for reception therein between the first and second passages of a planar card having opposed surfaces with conductive contact members thereon. First and second elongated contacts are firmly received, respectively, in the first and second passages. Each has a first contact surface positioned, respectively, for engagement with first and second of the mating contacts. The card receiving recesses of the chiclet modules as a group define a longitudinally extending card receiving slot. The elongated contacts each include a second contact surface projecting into the card receiving slot for engagement, respectively, with second conductive contact members on the planar card. A tubular ground shield may be slidably received on the insulative housing in proximate engagement with its outer peripheral surface. In this instance, the ground shield includes a first integral ground contact for engagement with a ground contact of an external unit associated with the mating contacts engaged by the first contact surfaces of the first and second elongated contacts and a second integral ground contact for engagement with a ground contact surface on the planar card inserted into the card receiving slot.

[0011] A chiclet module may be described as a pre-assembled module which includes one or more contacts, an insulator, and one or more shields. The pre-assembly of identical modules creates an advantageous economy of scale. Modular chiclet designs can be easily built or altered to afford interconnection of the exact number of contacts desired, relieving the user of having to select an oversized connector.

[0012] Each chiclet module can independently mate to a designated pattern of pads positioned along a substrate edge. The substrate may be either a printed circuit card or any other embodiment of contacts residing along

an edge of a thin insulator membrane or flat plane. One or more series of chiclet modules may be held in specific alignment by means of their emplacement in groups, gangs, or arrays residing in an overall plastic or metal frame.

[0013] Alignment for mating a stacked series of chiclet assemblies with a series of known target objects, such as a 2-dimensional contact pad pattern, normally presents a challenge of tolerance stack-up of the individual assemblies; the positional error of the last assembly in a series is perturbed by the sum, or accumulated tolerances, of all of the elements between it and the known position of a datum or reference object such as an alignment structure. The present invention advantageously eliminates accumulated tolerance by providing positioning structures in the overall frame for each chiclet module.

[0014] The present invention entails an insulator chiclet module whose interior contacts are shielded to the maximum extent by one or more generally box-shaped or tube-shaped shields enveloping as completely as possible the plastic insulator and its internal contacts. These shields comprise a part of the chiclet module subassembly proper, and no other insulating, shielding, or grounding structures are required in the overall frame. Manufacture of the shields into their closed or nearly closed perimeter cross sections may proceed from seamless or extruded tubes or from flat sheet stock folded into box-like or tube-like structures. A single shield may envelop the entire insulator structure and the contacts contained within, or an insulator may be provided with two or more contact-isolating lobes and a set of shields of which envelop individual lobes as completely as possible. In this card edge embodiment, the insulator is bilaterally symmetrical about the midplane of the card it admits, and this insulator accepts two box-like shields, one on each side of the card midplane. The shields include their own contacts members, and either these or their designated pads on the card edges, or both, may be specially elongated or positioned so as to establish, in a pre-emptive manner, shielding or common electrical grounding across the contact interface, in advance of electrical interconnection of other sensitive signal lines.

[0015] In some cases, mutual electrical contact between the shields of neighboring contacts is preferred, and the invention provides for chiclet modules with spring tabs or fingers which contact neighboring chiclet modules. In cases where individual electrical potentials of neighboring shields are to be maintained separate, these neighboring contacts may be eliminated, or an insulating structure may be provided in the overall frame to interpose or defeat this shield-to-shield interconnection.

[0016] The chiclet modules of the invention are designed to provide electrical contact preferably to both sides of the engaged or inserted substrate, card, or membrane edge. Single-sided deployments are also within the scope of the invention.

[0017] The inventive device may engage pad patterns of uniform spacing or pitch, or of a repeated or a staggered series of non-uniform patterns, as is common with contact arrays of shielded differential signal pairs. Individual chiclet modules, including those which span several units of pad pattern pitch, may be provided which engage with locally unique patterns. An example of this case would be an assembled connector comprising a first series of shielded differential pair units with repeated patterns of contacts on a first pitch, a second series of non-shielded modules each of which present a gang of conventional contact pairs on a second pitch, and a third series of high current power modules comprising heavy-duty contacts on a third pitch.

[0018] Thus is described an assembly containing sub-assemblies of unspecified numbers of identical shielded, modular units, which may be interspersed with non-shielded units of lower cost and also special-purpose units such as those designed for high current interconnections. The invention provides an overall frame to precisely position these modules with no accumulated tolerance stack-up. Unit members of the pattern of positioning structures provided in the frame may individually accept modules of a unitary design, or as a group may accept larger modules spanning several of these positioning structures. If desired, one or more positions in this frame may be left empty, or a blank or dummy module may be provided. The pitches and patterns of the contacts residing within these modules are neither necessarily equal to nor necessarily related to the pitch and pattern of the positioning structures in the overall frame.

[0019] Simple card-edge connectors rely on one or both end walls of the connector to align it with the pad patterns residing on the card. It is also known that one or more intermediate notches may be provided along a card edge for polarity, identification, and for improved registration of the connector to the pad patterns on the card by means of including a plenum or stub in the connector which registers in the slot(s) under proper insertion. While it is possible to provide special-purpose chiclet modules each of which include local registration features, the cost of producing a series of complimentary mating features along the card edge is likely to prohibit this approach. Therefore, our invention preferably provides a primary alignment plenum or stub or a primary set of these, incorporated in the overall frame in a manner which defines a precise positional relationship between this alignment feature or feature set, and the series of positioning structures within the overall frame which align the chiclet module sets. These primary features in the overall frame provide initial and precise alignment of the chiclet modules to their associated patterns on the card edge, by means of the chiclet modules being engaged and registered by the series of positioning structures in the overall frame and by virtue of the fact that both the positioning structures and the primary alignment features are integral features of the overall frame. Therefore, the locational accuracy of the chiclet

modules with respect to an alignment slot provided in the card edge (complimentary to the primary alignment feature of the frame) accrues no accumulated tolerances associated with the number, type, or distance from the frame's primary alignment features to its positioning structures which locate the chiclet modules. By this arrangement, the locational accuracy of any particular chiclet module is limited only by the accuracy and reliability of the process used to provide the features of the overall frame.

**[0020]** While conventional housings designed to receive a series of modules often provide an individual aperture or receiving section for each individual module or insert, our overall frame provides one or a small series of large longitudinal openings each of which may accept our chiclet modules in groups. The positioning structures mentioned elsewhere reside nearby and extend within the general openings. Our chiclet modules are designed with complimentary features to accept precise alignment by these positioning features in the frame. According to the preferred embodiment, these features are common to all types of chiclet modules and all openings in the frame, which affords a maximum diversity of the combinations and compositions of groups of chiclet modules available for assembly into the overall frame. However, it is understood that sets of frames and chiclet modules may be designed with distinct families of positioning structures and features, whereby these frames, in offering a first set of positioning structures in any one aperture and a mechanically incompatible second and distinct series of positioning structures in any other aperture will prevent the mingling of one family of chiclet module designs with a second family of designs within the same aperture. This segregation may be advantageous as a polarity feature, or as a means of eliminating assembly operator error, or to provide a special and proprietary series of product distinct from a general commodity design. An additional advantage of such segregation is the separation and deliberate location of a distinct series of chiclet modules of an especially robust design capable of withstanding severe service, such as high voltages, high currents, or exceptional mating life demands, whose special positioning structures are mechanically incompatible with elements from the series of standard service designs. In this case, such segregation can advantageously prevent an undesirable or dangerous condition, including the untimely or catastrophic failure of an improperly positioned standard service unit or chiclet module group accidentally subjected to severe service.

**[0021]** Where a continuous wall or perimeter structure would occlude visual inspection of good manufacturing processes, such as successful solder reflow of surface mount contacts, or full and complete insertion of chiclet modules into the overall frame, the frame is preferably provided with apertures, or continuous longitudinal cut-away sections, or a pattern of cut-out profiles (e.g., perforated, invected, embattled, engrailed, etc.) affording

such visual inspection by completely or intermittently revealing internal features, component positions, or the results of operations otherwise enclosed by the overall frame.

**[0022]** A primary feature, then, of the present invention is the provision of a modular electrical connector.

**[0023]** Another feature of the present invention is the provision of such a modular electrical connector in the form of a card edge connector with shielded modular inserts.

**[0024]** Still another feature of the present invention is the provision of such a modular connector including an elongated longitudinally extending outer frame defining a reception region adapted to receive a plurality of chiclet modules including contact members and lying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with mating contacts.

**[0025]** Yet another feature of the present invention is the provision of such a modular connector wherein each chiclet module includes an insulative housing having first and second spaced generally parallel elongated passages therein and a card receiving recess for reception therein between the first and second passages of a planar card having opposed surfaces with conductive contact members thereon, a first elongated contact firmly received in the first passage having a first contact surface positioned for engagement with a first of the mating contacts, a second elongated contact firmly received in the second passage having a first contact surface positioned for engagement with a second of the mating contacts, wherein the card receiving recesses of the plurality of chiclet modules as a group defines a longitudinally extending card receiving slot, the first elongated contact including a second contact surface projecting into the card receiving slot for engagement with a first conductive contact member on the planar card inserted into the card receiving slot and the second elongated contact including a second contact surface projecting into the card receiving slot in the direction of the first elongated contact for engagement with a second conductive contact member on the planar card inserted into the card receiving slot.

**[0026]** Still a further feature of the present invention is the provision of such a modular connector wherein a tubular ground shield is slidably received on the insulative housing in proximate engagement with its outer peripheral surface, the ground shield including a first integral ground contact for engagement with a ground contact of an external unit associated with the mating contacts engaged by the first contact surfaces of the first and second elongated contacts and a second integral ground contact for engagement with a ground contact surface on the planar card inserted into the card receiving slot.

**[0027]** Still another feature of the present invention is the provision of such a modular connector including first and second ground shields, each having a C-shaped

cross section, slidably received, respectively, on the insulative housing in opposed relationship and in proximate engagement with its outer peripheral surface, the first ground shield generally overlying the first elongated passage, the second ground shield generally overlying the second elongated passage, the first ground shield having first and second opposed limbs proximately overlying the first and second major sides, respectively, a first side limb proximately overlying the first minor side, and a first flange limb extending transverse of the first opposed limb slidably received in the first elongated slot whereby the first ground shield substantially completely surrounds the first elongated contact received in the first passage, the second ground shield having third and fourth opposed limbs proximately overlying the third and fourth major sides, respectively, a second side limb proximately overlying the second minor side, and a second flange limb extending transverse of the third opposed limb slidably received in the first elongated slot whereby the second ground shield substantially completely surrounds the second elongated contact received in the second passage, the first and second ground shields both including a first integral ground contact for engagement with a ground contact of an external unit associated with the mating contacts engaged by the first contact surfaces of the first and second elongated contacts, each of the first and second ground shields including a second integral ground contact for engagement with an associated ground contact surface on the planar card inserted into the card receiving slot.

[0028] Other and further features, advantages, and benefits of the invention will become apparent in the following description taken in conjunction with the following drawings. It is to be understood that the foregoing general description and the following detailed description are exemplary and explanatory but are not to be restrictive of the invention. The accompanying drawings which are incorporated in and constitute a part of this invention, illustrate one of the embodiments of the invention, and together with the description, serve to explain the principles of the invention in general terms. Like numerals refer to like parts throughout the disclosure.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The foregoing aspects and other features of the present invention are explained in the following description, taken in connection with the accompanying drawings, wherein:

Fig. 1 is an exploded perspective view of a card edge connector assembly embodying the present invention.

Fig. 2 is a side elevation view of the card edge connector assembly illustrated in Fig. 1, certain parts being cut away and shown in section;

Fig. 3 is a top plan view of the card edge connector assembly illustrated in Figs. 1 and 2;

Fig. 4 is an end elevation view of the card edge connector assembly illustrated in Figs. 1, 2, and 3;

Fig. 5 is a perspective view of a grouping of chiclet modules according to the invention positioned on a motherboard but absent the outer frame which normally envelops the chiclet modules;

Fig. 6 is a perspective view of an insulative housing for a chiclet module with elongated contacts in place;

Fig. 7 is another perspective view of the insulative housing for a chiclet module but without elongated contacts being illustrated;

Fig. 8A is a front elevation view of the insulative housing illustrated in Figs. 6 and 7;

Fig. 8B is a side elevation view of the insulative housing illustrated in Figs. 6, 7, and 8A;

Fig. 8C is a rear elevation view of the insulative housing illustrated in Figs. 6, 7, 8A, and 8B;

Fig. 8D is a side elevation view, taken opposite that of Fig. 8B of the insulative housing illustrated in Figs. 6, 7, 8A, 8B, and 8C;

Fig. 9 is a perspective view illustrating opposed ground shields, each having a C-shaped cross section for slidable reception, respectively, on an outer peripheral surface of the insulative housing of Figs. 6, 7, 8A, 8B, 8C, and 8D;

Fig. 10 is a front elevation view of a chiclet module into which a planar card such as a daughter board is about to be inserted;

Fig. 11 is a side elevation view of the chiclet module illustrated in Fig. 10

Fig. 12 is a perspective view illustrating a single tubular ground shield which is another embodiment of the pair of opposed ground shields illustrated in Fig. 9;

Fig. 13 is side elevation view of a modified chiclet module which includes the single tubular ground shield illustrated in Fig. 12;

Fig. 14 is a detail view in section illustrating a portion of the outer frame provided with a variety of locating features at a plurality of longitudinally spaced locations for positioning the chiclet modules at defined

spaced locations within the outer frame;

Figs. 15, 16, 17, 18, are detail section views, similar to Fig. 14, illustrating variations of the construction of Fig. 14, each illustrating a portion of the outer frame provided with a variety of different locating features at a plurality of longitudinally spaced locations, also for positioning the chiclet modules at defined spaced locations within the outer frame;

Fig. 19 is a detail exploded view in elevation illustrating a modified outer frame in which a pair of longitudinally spaced septum members are provided, each with a registration feature enabling a suitably formed planar card with conductive contact members to be fully inserted into the card receiving slot of the card edge connector assembly.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0030] Referring to Fig. 1, there is shown an exploded perspective view of a card edge connector assembly 20 incorporating features of the present invention. Although the present invention will be described with reference to the embodiments shown in the drawings, it should be understood that the present invention can be embodied in many alternate forms of embodiments. In addition, any suitable size, shape or type of elements or materials could be used.

[0031] The card edge connector assembly 20 includes a plurality of contact pads 22 arranged in a contact pattern 23 on an underlying contact surface 24 in the form of a motherboard 26, for example. A planar card 28, a daughter board, for example, has first and second opposed surfaces 30, 32 with conductive contact members 34 on at least one of the opposed surfaces.

[0032] Viewing now also Figs. 2-5, an elongated longitudinally extending outer frame 36 defines a reception region 38 which is adapted to receive a plurality of chiclet modules 40. Each of the chiclet modules 40 includes contact members (to be described below) and the chiclet modules lie side by side in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with the mating contact pads 22 on the underlying contact surface 24. The outer frame 36 includes opposed spaced end walls 42, opposed spaced side walls 44, and a top wall 46 integrally joining the end walls and the side walls. The end walls, side walls, and top wall together define the reception region 38, the top wall having a longitudinally extending aperture 48. The end walls 42 and the side walls 44 extend to a lower rim 50 distant from the top wall 46 and define, interiorly, an opening 52 through which the chiclet modules are inserted into the reception region 38.

[0033] Turning now to Figs. 6, 7, and 8A-8D, each chiclet module 40 includes an insulative housing 54 which has first and second spaced generally parallel elongat-

ed passages 56, 58 therein and a card receiving recess 60 for reception of the planar card 28 (Fig. 1) between the first and second passages. A first elongated contact 62 is firmly received in a known manner in the first passage 56 and has a first contact surface 64 positioned for engagement with an associated contact pad 22 (Fig. 1) on the contact pattern 23 of the underlying contact surface 24 using known techniques. In a similar fashion, a second elongated contact 66 is firmly received in the second passage 58 having a first contact surface 68 positioned for engagement with another associated contact pad 22 on the contact pattern 23 of the underlying contact surface 24. Although shown as being surface mount contacts, any type of termination (e.g. press-fit, pin-in-paste) could be used.

[0034] As seen in Fig. 1, the card receiving recesses 60 of the plurality of chiclet modules 40 integrated as a group within the outer frame 36 define a longitudinally extending card receiving slot 70. Turning back to Fig. 6, the first elongated contact 62 includes a second contact surface 72 projecting into the card receiving slot 70 (or recess 60 of an individual chiclet module 40). The second contact surface 72 engages with an associated conductive contact member 34 on the first surface 30 of the planar card 28 inserted into the card receiving slot. In a similar fashion, the second elongated contact 66 includes a second contact surface 74 projecting into the card receiving slot 70 (or recess 60 of an individual chiclet module 40) in the direction of the first elongated contact 62. This time, the second contact surface 74 engages with a second one of the conductive contact members 34, this one being on the second surface 32 of the planar card 28 inserted into the card receiving slot.

[0035] With continued attention to Fig. 1, the lower rim 50 of the outer frame 36 includes a cutout region 76 enabling visual inspection of the first contact surfaces 64, 68 of the first and second elongated contacts 62, 66 when engaged with their associated contact pads, respectively. Also, aperture 48 of the outer frame 36 is aligned with the card receiving slot 70 when the plurality of chiclet modules are received in the reception region 38.

[0036] Turn now to Figs. 9, 10, and 11 which illustrate opposed ground shields 78, 80, each having a C-shaped cross section for slidable reception, respectively, on an outer peripheral surface 82 of the insulative housing. When so received on the insulative housing, the ground shields 78, 80 are positioned in opposed relationship and in proximate engagement with the outer peripheral surface 82. The first ground shield 78 generally overlies the first elongated passage 56 and the second ground shield 80 generally overlies the second elongated passage 58. The ground shields 78, 80 both include a first integral ground contact 84 for engagement (Fig. 1) with an associated ground contact or pad 86 of an external unit such as the mother board 26. In turn, the ground contact or pad 86 is associated with the mating contact pads 22 engaged by the first contact surface-

es 64, 68 of the first and second elongated contacts 62, 66. Further, each of the ground shields 78, 80 includes a second integral ground contact 88 for engagement with an associated ground contact surface 90 on the planar card 28 inserted into the card receiving slot 70. As seen especially well in Figs. 9, 10, and 11, each of the ground shields 78, 80 has a cutout region 92. The cutout region 92 enables visual inspection of the first contact surfaces 64, 68 of the first and second elongated contacts 62, 66 when engaged with their associated mating contact pads 22, respectively, and of the first and second ground contacts 84 when engaged with their respective mating ground contact pads 86 of the external unit or motherboard 26.

[0037] Viewing especially Figs. 8A, 8B, 8C, and 8D, the outer peripheral surface 82 of the insulative housing 54 has first and second opposed major sides 94, 96, respectively, and a first minor side 98 joining the first and second major sides. In a similar manner, the outer peripheral surface 82 of the insulative housing 54 has third and fourth opposed major sides 100, 102 and a second minor side 104 joining the first and second major sides. The first and third major sides 94, 100 are coplanar and the second and fourth major sides 96, 102 are coplanar. By the same token, the first and second minor sides 98, 104 lie in parallel spaced apart planes. The insulative frame 54 also has a first elongated slot 106 spaced from and aligned with the card receiving recess 60 and having an inlet positioned intermediate the first and third major sides, 94, 100. The first elongated slot 106 is generally parallel with the first and second minor sides 98, 104. The insulative frame 54 also has a second elongated slot 107, also spaced from and aligned with the card receiving recess 60 and having an inlet positioned intermediate the second and fourth major sides 96, 102, respectively. The second elongated slot 107 is generally parallel with the first and second minor sides 98, 104 and coplanar with the first elongated slot 106.

[0038] A complete chiclet module 40 includes, as earlier described in a more general description, the first and second ground shields 78, 80, and these will now be described more completely as they are mounted on the insulative housing 54. Each ground shield 78, 80 has a C-shaped cross section and has earlier been described as being slidably received on the insulative housing in opposed relationship and in proximate engagement with the outer peripheral surface 82. The first ground shield 78 generally overlies the first elongated passage 56 and the second ground shield 80 generally overlies the second elongated passage 58. The first ground shield 78 has first and second opposed limbs 108, 110 proximately overlying the first and second major sides 94, 96, respectively, and a first side limb 112 proximately overlies the first minor side 98. A first flange limb 114 extends transverse of the first opposed limb 108 and is slidably received in the first elongated slot 106. With this construction, the first ground shield 78 substantially completely surrounds the first elongated contact 62 received

in the first elongated passage 58.

[0039] In a similar manner, the second ground shield 80 has third and fourth opposed limbs 116, 118 proximately overlying the third and fourth major sides 100, 102, respectively. A second side limb 120 proximately overlies the second minor side 104. A second flange limb 122 extends transverse of the third opposed limb 116 and is slidably received in the second elongated slot 107. With this construction, the second ground shield substantially completely surrounds the second elongated contact 66 received in the second passage 58.

[0040] It was earlier explained that the first and second ground shields 78, 80 both include a first integral downwardly projecting ground contact 84 for engagement with a mating ground contact or pad 86 of an external unit such the motherboard 26. As earlier noted, the mating ground contact or pad 86 is associated with the mating contacts 22 engaged by the first contact surfaces 64, 68 of the first and second elongated contacts 62, 66. Also, each of the first and second ground shields 78, 80 includes a second integral ground contact 88 for engagement with an associated ground contact surface 90 on the planar card 28 inserted into the card receiving slot 60.

[0041] As particularly well seen in Figs. 1 and 10, both of the second integral ground contacts 88 of the first and second ground shields 78, 80 project into the card receiving recess 60, with the ground contact 88 of the first ground shield 78 generally facing the ground contact 88 of the second ground shield 80. Further, each of the second integral ground contacts 88 of the first and second ground shields project into the card receiving recess 60 at a location nearer the top wall 46 of the outer frame 36 than either of the second contact surfaces 72, 74 of the first and second elongated contacts 62, 66. In this manner, an early mate, late break, grounding operation can be established. More specifically, this construction serves to establish in a preemptive manner common electrical grounding across the contact interface in advance of other electrical interconnection of the first and second electrical contacts 62, 66.

[0042] Turn now to Figs. 12 and 13 for a description of another embodiment of the invention. In this instance, in place of the pair of opposed ground shields 78, 80 enveloping the insulative housing 54, a single tubular ground shield 128 is slidably received on the insulative housing in proximate engagement with the outer peripheral surface 82. As with the combined pair of C-shaped ground shields 78, 80, the tubular ground shield 128 includes a first pair of integral ground contacts 130, each provided for engagement with a ground contact 86 (Fig. 1) of an external unit or motherboard 26 associated with the mating contacts engaged by the first contact surfaces of the first and second elongated contacts 62, 66.

[0043] The tubular ground shield 128 also includes a second pair of integral ground contacts 132 for engagement with the ground contact surfaces 90 (see Fig. 1) on the planar card 28 inserted into the card receiving



slot 70 of the insulative housing 54. In every way, the tubular ground shield 128 operates in the manner of the pair of opposed ground shields 78, 80. This includes the provision of a pair of flange limbs 134, similar to the flange limbs 122, which are mutually opposed and coplanar and are slidably received in the second elongated slots 106, 107 of the insulative housing 54. With this construction, the ground shield 128 substantially completely surrounds each of the elongated contacts 62, 66 received in the passages 56, 58.

[0044] In a preferred construction, again viewing Figs. 6 and 7, the insulative housing 54 is formed with first and second spaced pairs of generally parallel elongated passages therein 56 and 56A and 58 and 58A with an elongated contact firmly received in each in the manner previously described. As previously, each elongated contact has first and second contact surfaces with the construction previously described for mating contact with associated contact surfaces on the motherboard 26 and on the planar card 28.

[0045] In order to hold the chiclet modules at defined spaced locations within the outer frame 36, the outer frame may be provided with a variety of locating features at a plurality of longitudinally spaced locations. In Fig. 14, for example, the top wall 46 is provided with a plurality of laterally extending protrusions 136 projecting into the reception region 38 which engage associated chiclet modules 40 and maintain them in a spaced side-by-side relationship. In this instance, the spacing between each pair of protrusions is approximately equal to the thickness of a chiclet module and adjacent chiclet modules are maintained a slight distance apart. Similar constructions are illustrated in Figs. 15 and 16. In Fig. 15, a plurality of similarly spaced upright protrusions 138 are provided on the inside surfaces of the side walls 44. In Fig. 16, a plurality of similarly spaced corner protrusions 140 are provided at the inner interface between the side walls 44 and top wall 46. In each instance, the protrusions 136 or 138 or 140 repeat at the same pitch distances for the entire length of the outer frame 36.

[0046] In other instances illustrated in Figs. 17 and 18, each chiclet module has complimentary locating features formed for engagement with locating features of the outer frame, again, such that each chiclet module is positively positioned with respect to the outer frame. In Fig. 17, for instance, lateral protrusions 142 are illustrated which may be of the nature and longitudinal spacing of the protrusions 136. In this instance, modified chiclet modules 40A have a laterally extending groove 144 which matingly receives the lateral protrusions 142 to maintain the chiclet modules in a spaced side-by-side relationship with adjacent chiclet modules maintained a slight distance apart. In Fig. 18, downwardly extending protrusions 146 are appropriately located to project into the uppermost end portions of the elongated passages 56, 56A, 58, and 58A of the insulative housing 54. This construction is also seen, for example, in Fig. 2. In the same manner as in the previously described embod-

ments, in this instance, the chiclet modules are maintained in a spaced side-by-side relationship with adjacent chiclet modules maintained a slight distance apart.

[0047] As seen in Figs. 1, 2, and 3, a septum member 148 may be provided intermediate the spaced end walls 42 and lying in a plane parallel to the end walls. With this construction, the reception region 38 is separated into first and second chambers 150, 152 (Fig. 2) for receiving the chiclet modules 40. A retention clip 154 may be attached to the septum member 148 at the lower rim, extending away from the outer frame 36 in a direction away from the top wall 46.

[0048] Indeed, a plurality of retention clips 154 may be provided for attaching the outer frame 36 to an underlying surface, for example, to the motherboard 26, one of the retention clips mounted on each end wall 42 and on each septum member 148 at the lower rim 50. In each instance, the retention clip extends in a direction away from the top wall 46 and are secured to the substrate with known techniques.

[0049] In Fig. 19, a modified outer frame 36A is illustrated in which a pair of longitudinally spaced septum members 156, 158 are provided intermediate the spaced end walls 42A. The septum members 156, 158 lie in planes parallel to the end walls 42A and thereby separate the reception region 38A into a plurality of chambers 160, 162, 164 for receiving the chiclet modules 40. Each of the septum members 156, 158 includes a registration feature, for example, uppermost edges 166, 168 enabling a modified planar card 28A with conductive contact members thereon (not shown) and complementary registration features 170, 172 to be fully inserted through the longitudinally extending aperture of the top wall 46A and into the card receiving slot. When this occurs, the slotted registration features 170, 172 are positioned and sized for engageable reception, first of the uppermost edges 166, 168, respectively, then the remainder of the septum members 156, 158 so that, in turn, the conductive contact members on the planar card 28A can be mechanically and electrically engaged by the second elongated contact surfaces of the elongated contacts 62, 66 of the plurality of chiclet modules.

[0050] Of course, the corollary is true, that if the planar card 28A does not possess the registration features 170, 172 positioned and sized to receive the septum members 156, 158, the planar card would be rejected and incapable of use with the system of the invention.

[0051] When the chiclet modules 40 are arranged in side-by-side fashion within the outer frame 36, it may be desirable to provide some further instrumentality, other than those already described, to keep adjacent chiclet modules at spaced distances apart. This can be achieved, for example, by providing at least one boss member 174, and preferably several at spaced apart locations on the outer peripheral surface 82 of one insulative housing 54 of a chiclet module 40 such that it is, or they are, engageable with the insulative housing of an adjoining chiclet module. See Fig. 2. The boss mem-



ber would be dimensioned to prevent mutual engagement of the ground shield 128 or ground shields 78, 80 of the adjoining chiclet modules.

[0052] In an alternative construction, a plurality of mutually opposed pairs of boss members 176, 178 (Figs. 2 and 11) may be provided on the insulative housings of adjoining chiclet modules. In this instance, the mutually opposed pairs of boss members are aligned for engagement and dimensioned to prevent mutual engagement of the ground shields of the adjoining chiclet modules.

[0053] Recognizing that there are instances in which it is desirable for the ground shields of adjoining chiclet modules to be electrically in common, a bridging contact 180 (Figs. 5 and 9) may be provided on at least one of the ground shields of one of the chiclet members 40 engageable with the ground shield of its adjoining chiclet member.

[0054] It should be understood that the foregoing description is only illustrative of the invention. Various alternatives and modifications can be devised by those skilled in the art without departing from the invention. Accordingly, the present invention is intended to embrace all such alternatives, modifications and variances which fall within the scope of the appended claims.

#### Claims

##### 1. A card edge connector comprising:

- an elongated longitudinally extending outer frame (36) defining a reception region (38) adapted to receive a plurality of modules (40, 40A) including contact members (34) and lying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with mating contacts (22), each module (40, 40A) including:
  - first (56, 56A) and second passages (58, 58A) therein and a card receiving recess (60) for reception therein between the first (56, 56A) and second passages (58, 58A) of a planar card (28, 28A) having opposed surfaces (30, 32) with conductive contact members (34) thereon;
  - a first contact (62) received in the first passage (56, 56A) having a first contact surface (64) positioned for engagement with a first of the mating contacts (22);
  - a second contact (66) received in the second passage (58, 58A) having a first contact surface (64) positioned for engagement with a second of the mating contacts (22);
 wherein the card receiving recesses (60) of the plurality of modules (40, 40A) as a

group define a longitudinally extending card receiving slot (70), the first contact (62) including a second contact surface (68) projecting into the card receiving slot (70) for engagement with a first conductive contact member (34) on the planar card (28, 28A) inserted into the card receiving slot (70) and the second contact (66) including a second contact surface (68) projecting into the card receiving slot (70) in the direction of the first contact (62) for engagement with a second conductive contact member (34) on the planar card (28, 28A) inserted into the card receiving slot (70).

##### 2. A card edge connector according to claim 1 characterized in that,

the outer frame (36) includes locating features at a plurality of longitudinally spaced locations; and  
that each module (40, 40A) has complimentary locating features formed for engagement with the locating features of the outer frame (36) whereby each module (40, 40A) is positively positioned with respect to the outer frame (36).

##### 3. A card edge connector according to claim 2 characterized in that,

the outer frame (36) includes locating features at a plurality of longitudinally spaced locations; and  
that the locating feature on the outer frame (36) include protrusions (136) projecting into the reception region (38) which engage associated modules (40, 40A) and maintain them in a spaced relationship.

##### 4. A card edge connector according to claim 1 characterized in that, the outer frame (36) includes opposed spaced end walls (42, 42A), opposed spaced side walls (42, 42A), and a top wall (46, 46A) integrally joining the end walls (42, 42A) and the side walls (42, 42A), the end walls (42, 42A), side walls (42, 42A), and top wall (46, 46A) together defining the reception region (38), the top wall (46, 46A) having a longitudinally extending aperture (48) aligned with the card receiving slot (70) of the plurality of modules (40, 40A) when received in the reception region (38), the end walls (42, 42A) and side walls (42, 42A) extending to a lower rim (50) distant from the top wall (46, 46A) and defining an opening through which the modules (40, 40A) are placed into the reception region (38).

##### 5. A card edge connector according to claim 4 char-

acterized in that the lower rim (50) includes a cutout region (76) enabling visual inspection of the first contact surfaces (64) of the first and second contacts (62, 66) when engaged with the first and second of the mating contacts (22), respectively.

6. A card edge connector according to claim 4 including:

- at least one retention clip (154) for attaching the outer frame (36) to an underlying surface, the retention clip (154) mounted on a wall at the lower rim (50) and extending away therefrom in a direction away from the top wall (46, 46A).

7. A card edge connector according to claim 4 including:

a septum member (148) intermediate the spaced end walls (42, 42A) and lying in a plane parallel thereto thereby separating the reception region (38) into first and second chambers (150, 152) for receiving the modules (40, 40A).

8. A card edge connector according to claim 4 including:

- a septum member (148) intermediate the spaced end walls (42, 42A) and lying in a plane parallel thereto thereby separating the reception region (38) into first and second chambers (150, 152) for receiving the modules (40, 40A); and
- a retention clip (154) attached to the septum member (148) at the lower rim (50) and extending away therefrom in a direction away from the top wall (46, 46A).

9. A card edge connector according to claim 7 characterized in that the septum member (148) includes a registration feature enabling a planar card (28, 28A) with conductive contact members (34) thereon and a complementary registration feature to be fully inserted through the longitudinally extending aperture (48) of the top wall (46, 46A) and into the card receiving slot (70) for engagement by the second contact surfaces (68) of the contacts of the plurality of modules (40, 40A).

10. A card edge connector according to claim 4 including:

- a plurality of spaced apart septum members (148) intermediate the spaced end walls (42, 42A),

wherein the septum members (148) all lying in planes parallel to the end walls (42, 42A) thereby separating the reception region (38) into a plurality

of chambers (160, 162, 164) for receiving the modules (40, 40A).

11. A card edge connector according to claim 10 including:

- a plurality of retention clips (154) for attaching the outer frame (36) to an underlying surface,

wherein one of the retention clips (154) mounted on each end wall (42, 42A) and on each septum member (148) at the lower rim (50), each retention member extending in a direction away from the top wall (46, 46A).

12. A card edge connector according to claim 10 characterized in that at least one septum member (148) includes a registration feature enabling a planar card (28, 28A) with conductive contact members (34) thereon and complementary registration features to be fully inserted through the longitudinally extending aperture (48) of the top wall (46, 46A) and into the card receiving slot (70) for engagement by the second contact surfaces (68) of the contacts of the plurality of modules (40, 40A).

13. A card edge connector according to claim 1 characterized in that the insulative housing (54) has an outer peripheral surface (82); and including:

- a tubular ground shield (128) slidably received on the insulative housing (54) in proximate engagement with the outer peripheral surface (82), the ground shield including:

- a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66); and
- a second integral ground contact (88) for engagement with a ground contact (86) surface on the planar card (28, 28A) inserted into the card receiving slot (70).

14. A card edge connector according to claim 13 characterized in that the tubular ground shield (128) has a cutout region (92) enabling visual inspection of the first contact surfaces (64) of the first and second contacts (62, 66) when engaged with the first and second of the mating contacts (22), respectively, and of the first and second ground contacts (84, 88) when engaged with the mating ground contacts (86) of the external unit (26).

15. A card edge connector according to claim 1 characterized in that the insulative housing (54) has an

outer peripheral surface (82); and including:

- first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing (54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground contact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).
- 16. A card edge connector according to claim 15 characterized in that each of the first and second ground shields (78, 80) has a cutout region (92) enabling visual inspection of the first contact surfaces (64) of the first and second contacts (62, 66) when engaged with the first and second of the mating contacts (22), respectively, and of the first and second ground contacts (84, 88) when engaged with the mating ground contacts of the external unit (26).
- 17. A card edge connector according to claim 1 characterized in that the insulative housing (54) has an outer peripheral surface (82) with first and second opposed major sides (94, 96) and a first minor side (98) joining the first and second major sides, and having third and fourth opposed major sides (100, 102) and a second minor side (104) joining the first and second major sides, the first and third major sides (94, 100) being coplanar, the second and fourth major sides being coplanar, the first and second minor sides (98, 104) lying in parallel spaced apart planes, the insulative frame having a first elongated slot (106) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the first and third major sides (94, 100), the first elongated slot (106) being generally parallel with the first and second minor sides (98, 104), the insulative frame having a second elongated slot (107) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the second and fourth major sides, the second elongated slot (107) being generally parallel with the first and second minor sides (98, 104); and including:

  - first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing (54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first ground shield (78) having first and second opposed limbs (108, 110) proximately overlying the first and second major sides, respectively, a first side limb (112) proximately overlying the first minor side (98), and a first flange limb (114) extending transverse of the first opposed limb slidably received in the first elongated slot (106) whereby the first ground shield (78) substantially completely surrounds the first contact (62) received in the first passage (56, 56A), the second ground shield (80) having third and fourth opposed limbs (116, 118) proximately overlying the third and fourth major sides, respectively, a second side limb (120) proximately overlying the second minor side (104), and a second flange limb (122) extending transverse of the third opposed limb slidably received in the second elongated slot (107) whereby the second ground shield (80) substantially completely surrounds the second contact (66) received in the second passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground contact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).
- 18. A card edge connector according to claim 15 characterized in that both of the second integral ground contacts of the first and second ground shields (78, 80) project into the card receiving slot (70); and that the second integral ground contact (88) of the first ground shield (78) generally faces the second integral ground contact (88) of the second ground shield (80).
- 19. A card edge connector according to claim 15 characterized in that the second integral ground contacts of the first and second ground shields (78, 80) project into the card receiving slot (70) at a location nearer the top wall (46, 46A) of the outer frame (36) than either of the second contact surfaces (68) of

- the first and second contacts (62, 66) to establish an early mate, late break, grounding operation.
20. A card edge connector according to claim 15 including:
- at least one boss member (174) on the insulative housing (54) of one module (40, 40A) engageable with the insulative housing (54) of an adjoining module (40, 40A), the boss member (174) dimensioned to prevent mutual engagement of the ground shields of the adjoining modules (40, 40A).
21. A card edge connector according to claim 15 including:
- a plurality of mutually opposed pairs of boss members on the insulative housings of adjoining modules (40, 40A), such mutually opposed pairs of boss members (174) being engaged and dimensioned to prevent mutual engagement of the ground shields of the adjoining modules (40, 40A).
22. A card edge connector according to claim 15 including:
- a bridging contact (180) on at least one of the ground shields of one of the chiclet members engageable with the ground shield of its adjoining chiclet member.
23. A module (40, 40A) for use with a card edge connector comprising:
- an insulative housing (54) having first and second spaced passages therein and a card receiving recess (60) for reception therein between the first and second passages (56, 56A; 58, 58A) of a planar card (28, 28A) having opposed surfaces with conductive contact members (34) thereon, the card receiving recess (60) extending to a terminal region;
  - a first contact (62) received in the first passage (56, 56A) having a first contact surface (64) positioned for engagement with a first contact (62) of the mating contacts (22);
  - a second contact (66) received in the second passage (58, 58A) having a first contact surface (64) positioned for engagement with a second of the mating contacts (22);
- wherein the first contact (62) includes a second contact surface (68) projecting into the card receiving recess (60) for engagement with a first conductive contact member (34) on the planar card (28, 28A) inserted into the card receiving recess (60) and the second contact (66) includes a second contact surface (68) projecting into the card receiving recess (60) in the direction of the first contact (62) for engagement with a second conductive contact member (34) on the planar card (28, 28A) inserted into the card receiving recess (60).
24. A module (40, 40A) for use with a card edge connector according to claim 23 characterized in that each module (40, 40A) has locating features formed for engagement with complimentary locating features of an outer frame (36) whereby each module (40, 40A) is positively positioned with respect to the outer frame (36).
25. A module (40, 40A) for use with a card edge connector according to claim 23 characterized in that the insulative housing (54) has an outer peripheral surface (82); and including:
- a tubular ground shield (128) slidably received on the insulative housing (54) in proximate engagement with the outer peripheral surface (82), the ground shield including:
    - a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66); and
    - a second integral ground contact (88) for engagement with a ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).
26. A card edge connector according to claim 23 characterized in that the insulative housing (54) has an outer peripheral surface (82); and including:
- first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing (54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground con-

tact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving recess (60).

27. A card edge connector according to claim 13 characterized in that

the insulative housing (54) has an outer peripheral surface (82) with first and second opposed major sides (94, 96) and a first minor side (98) joining the first and second major sides, and having third and fourth opposed major sides (100, 102) and a second minor side (104) joining the first and second major sides, the first and third major sides (94, 100) being coplanar, the second and fourth major sides being coplanar, the first and second minor sides (98, 104) lying in parallel spaced apart planes, the insulative frame having a first elongated slot (106) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the first and third major sides (94, 100), the first elongated slot (106) being generally parallel with the first and second minor sides (98, 104), the insulative frame having a second elongated slot (107) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the second and fourth major sides, the second elongated slot (107) being generally parallel with the first and second minor sides (98, 104); and including:

- first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing (54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first ground shield (78) having first and second opposed limbs (108, 110) proximately overlying the first and second major sides, respectively, a first side limb (112) proximately overlying the first minor side (98), and a first flange limb (114) extending transverse of the first opposed limb slidably received in the first elongated slot (106) whereby the first ground shield (78) substantially completely surrounds the first contact (62) received in the first passage (56, 56A), the second ground shield (80) having third and fourth opposed limbs (116, 118) proximately overlying the third and fourth major sides, respectively, a second side limb (120) proximately overlying the second minor side (104), and a second flange limb (122) extending transverse of the third opposed limb slidably received in the first elongated slot (106) whereby the second

ground shield (80) substantially completely surrounds the second contact (66) received in the second passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground contact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).

28. A card edge connector according to claim 26 characterized in that both of the second integral ground contacts of the first and second ground shields (78, 80) project into the card receiving recess (60); and that the second integral ground contact (88) of the first ground shield (78) generally faces the second integral ground contact (88) of the second ground shield (80).

29. A card edge connector according to claim 26 characterized in that the second integral ground contacts of the first and second ground shields (78, 80) project into the card receiving slot (70) at a location nearer the top wall (46, 46A) of the outer frame (36) than either of the second contact surfaces (68) of the first and second contacts (62, 66) to establish an early mate, last break, grounding operation.

30. A card edge connector assembly comprising:

- a plurality of contact pads (22) arranged in a pattern (23) on an underlying contact surface (24) (24);
- a planar card (28, 28A) having first and second opposed surfaces (30, 32) with conductive contact members (34) on at least one of the opposed surfaces (30, 32);
- an elongated longitudinally extending outer frame (36) defining a reception region (38) adapted to receive a plurality of modules (40, 40A) including contact members (34) and tying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with the mating contact pads (22) on the underlying contact surface (24), each module (40, 40A) including:
  - an insulative housing (54) having first and second spaced generally parallel elongated passages therein and a card receiving recess (60) for reception therein between the first and second passages (58, 58A) of the planar card (28, 28A);

- a first contact (62) received in the first passage (56, 56A) having a first contact surface (64) positioned for engagement with a first contact (62) pad on the contact pattern of the underlying contact surface (24); and
- a second contact (66) received in the second passage (58, 58A) having a first contact surface (64) positioned for engagement with a second contact pad on the contact pattern of the underlying contact surface (24);

wherein the card receiving recesses (60) of the plurality of modules (40, 40A) as a group define a longitudinally extending card receiving slot (70), the first contact (62) including a second contact surface (68) projecting into the card receiving slot (70) for engagement with a conductive contact member (34) on the first surface of the planar card (28, 28A) inserted into the card receiving slot (70) and the second contact (66) including a second contact surface (68) projecting into the card receiving slot (70) in the direction of the first contact (62) for engagement with a second conductive contact member (34) on the second surface of the planar card (28, 28A) inserted into the card receiving slot (70).

31. A card edge connector assembly according to claim 30 characterized in that the insulative housing (54) has a lowermost end through which the first and second contacts (62, 66) project for engagement with the contact pads on the contact pattern of the underlying contact surface (24); and including:
- a stand-off knob member integral with the insulative housing (54) and extending away from the lowermost end thereof to a terminal surface engageable with the underlying contact surface (24) to thereby space the lowermost end from the underlying contact surface (24).
32. A card edge connector assembly according to claim 31 characterized in that the stand-off knob member has an axis generally parallel with the first and second elongated passages and aligned with the card receiving slot (70) to enable the insulative housing (54) to pivot about its axis within clearance limits with adjoining chisel members.
33. A card edge connector according to claim 30 characterized in that the insulative housing (54) has an outer peripheral surface (82); and including:
- first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing

(54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground contact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).

34. A card edge connector according to claim 30 characterized in that the insulative housing (54) has an outer peripheral surface (82) with first and second opposed major sides (94, 96) and a first minor side (98) joining the first and second major sides, and having third and fourth opposed major sides (100, 102) and a second minor side (104) joining the first and second major sides (94, 96), the first and third major sides (94, 100) being coplanar, the second and fourth major sides being coplanar, the first and second minor sides (98, 104) lying in parallel spaced apart planes, the insulative frame having a first elongated slot (106) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the first and third major sides (94, 100), the first elongated slot (106) being generally parallel with the first and second minor sides (98, 104), the insulative frame having a second elongated slot (107) spaced from and aligned with the card receiving recess (60) and having an inlet positioned intermediate the second and fourth major sides, the second elongated slot (107) being coplanar with the first and second minor sides (98, 104); including:

- first and second ground shields (78, 80), each having a C-shaped cross section, slidably received, respectively, on the insulative housing (54) in opposed relationship and in proximate engagement with the outer peripheral surface (82), the first ground shield (78) generally overlying the first elongated passage (56, 56A), the second ground shield (80) generally overlying the second elongated passage (58, 58A), the first ground shield (78) having first and second opposed limbs (108, 110) proximately overlying the first and second major sides, respectively, a first side limb (112) proximately overlying the first minor side (98), and a first flange limb (114)

extending transverse of the first opposed limb slidably received in the first elongated slot (106) whereby the first ground shield (78) substantially completely surrounds the first contact (62) received in the first passage (56, 56A), the second ground shield (80) having third and fourth opposed limbs (116, 118) proximately overlying the third and fourth major sides, respectively, a second side limb (120) proximately overlying the second minor side (104), and a second flange limb (122) extending transverse of the third opposed limb slidably received in the first elongated slot (106) whereby the second ground shield (80) substantially completely surrounds the second contact (66) received in the second passage (58, 58A), the first and second ground shields (78, 80) both including a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first contact surfaces (64) of the first and second contacts (62, 66), each of the first and second ground shields (78, 80) including a second integral ground contact (88) for engagement with an associated ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).

35. A card edge connector according to claim 30 characterized in that the outer frame (36) includes opposed spaced end walls (42, 42A), opposed spaced side walls (42, 42A), and a top wall (46, 46A) integrally joining the end walls (42, 42A) and the side walls (42, 42A), the end walls (42, 42A), side walls (42, 42A), and top wall (46, 46A) together defining the reception region (38), the top wall (46, 46A) having a longitudinally extending aperture (48) aligned with the card receiving slot (70) of the plurality of modules (40, 40A) when received in the reception region (38), the end walls (42, 42A) and side walls (42, 42A) extending to a lower rim (50) distant from the top wall (46, 46A) and defining an opening through which the modules (40, 40A) are placed into the reception region (38).

36. A card edge connector according to claim 35 characterized in that the lower rim (50) includes a cutout region enabling visual inspection of the first contact surfaces (64) of the first and second contacts (62, 66) when engaged with the first and second of the mating contacts (22), respectively.

37. A module (40, 40A) for use with a card edge connector comprising:

- an insulative housing (54) having first and second spaced pairs of generally parallel elongated passages therein and a card receiving re-


cess (60) for reception therein between the first and second pair of passages of a planar card (28, 28A) having opposed surfaces with conductive contact members (34) thereon, the card receiving recess (60) extending to a terminal region;


- a first pair of contacts received, respectively, in the first pair of passages, each contact having a first contact surface (64) positioned for engagement with a respective pair of first contacts (62) of the mating contacts (22);
- a second pair of contacts received, respectively, in the second pair of passages, each contact having a first contact surface (64) positioned for engagement with a respective pair of second contacts (66) of the mating contacts (22);

wherein each of the first pair of contacts includes a second contact surface (68) projecting into the card receiving recess (60) for engagement, respectively, with a first pair of conductive contact members (34) on the planar card (28, 28A) inserted into the card receiving recess (60) and each of the second pair of contacts includes a second contact surface (68) projecting into the card receiving recess (60) in the direction of the first pair of contacts for engagement, respectively, with a second pair of conductive contact members (34) on the planar card (28, 28A) inserted into the card receiving recess (60).



FIG. 1

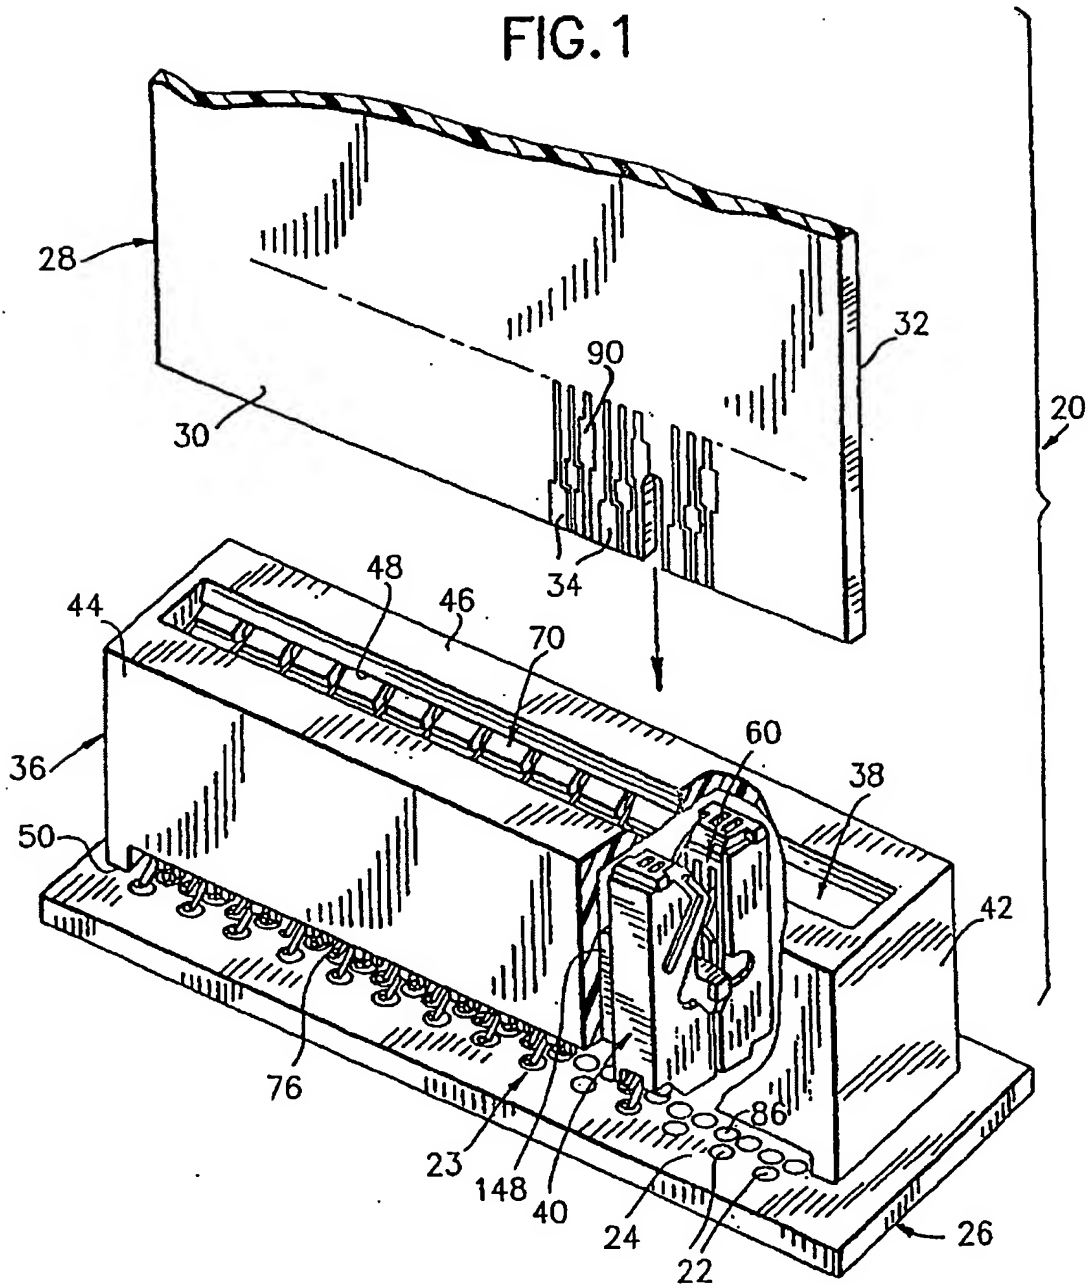

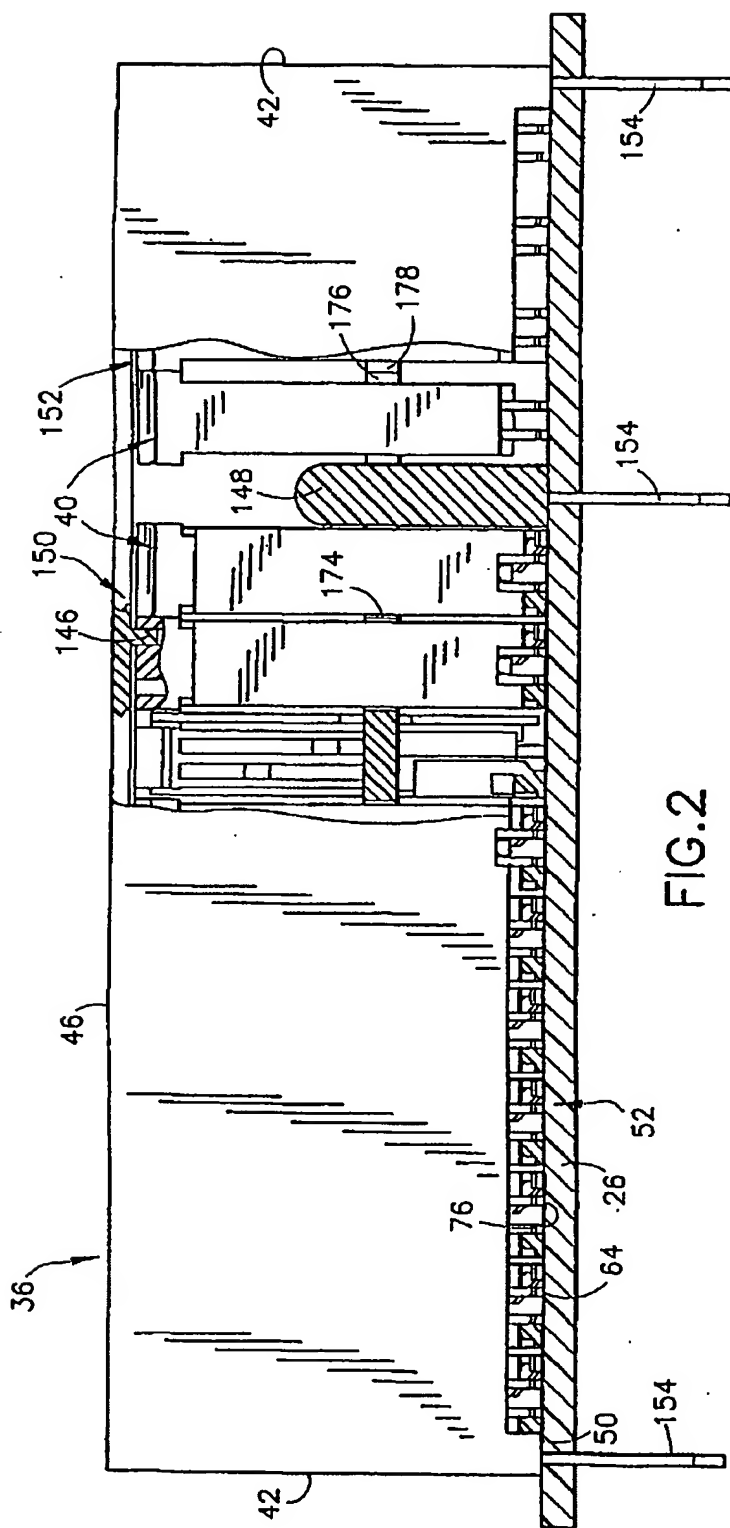

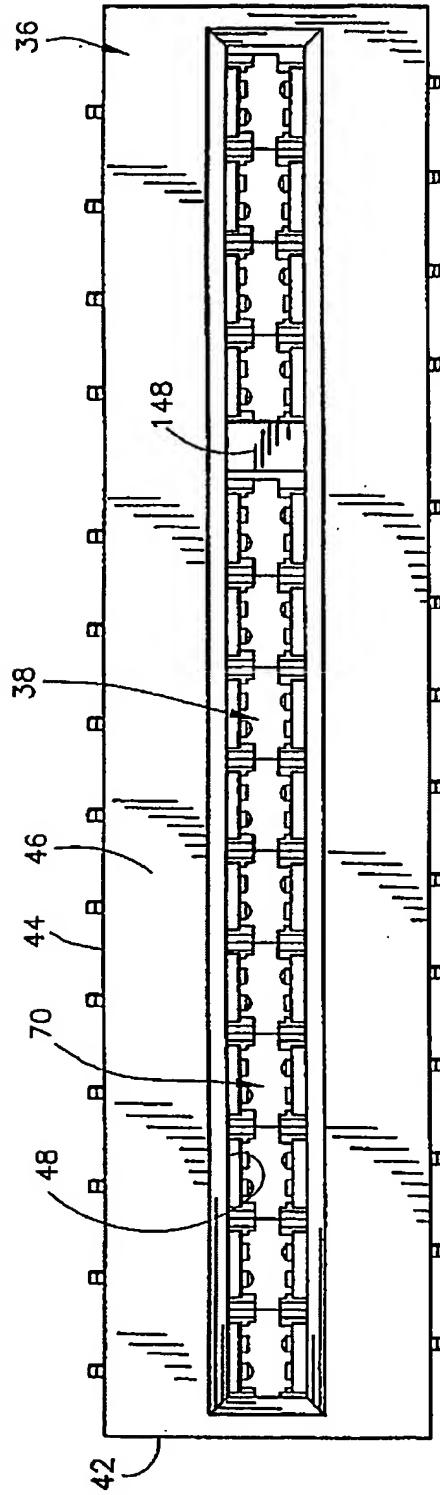


FIG. 3

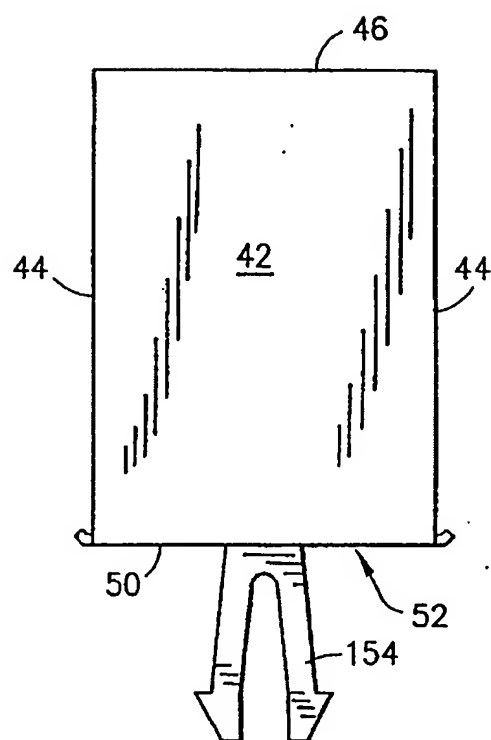
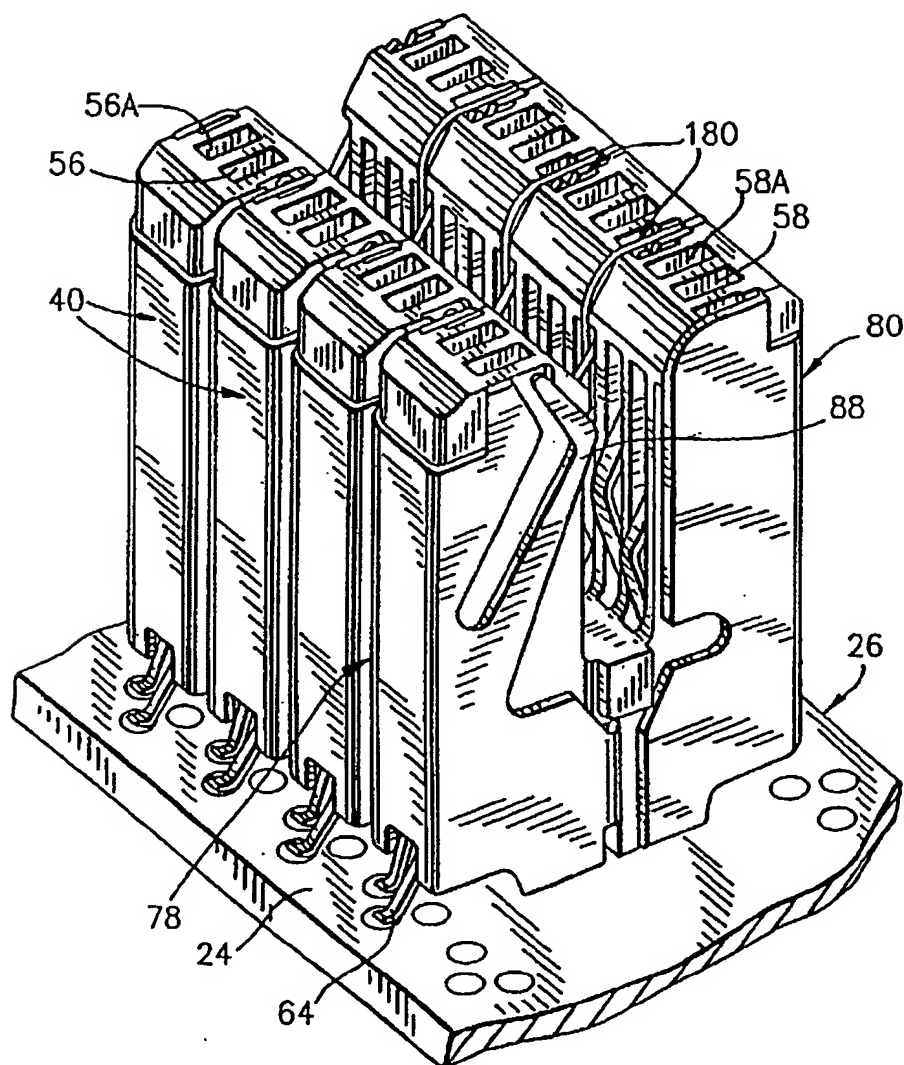
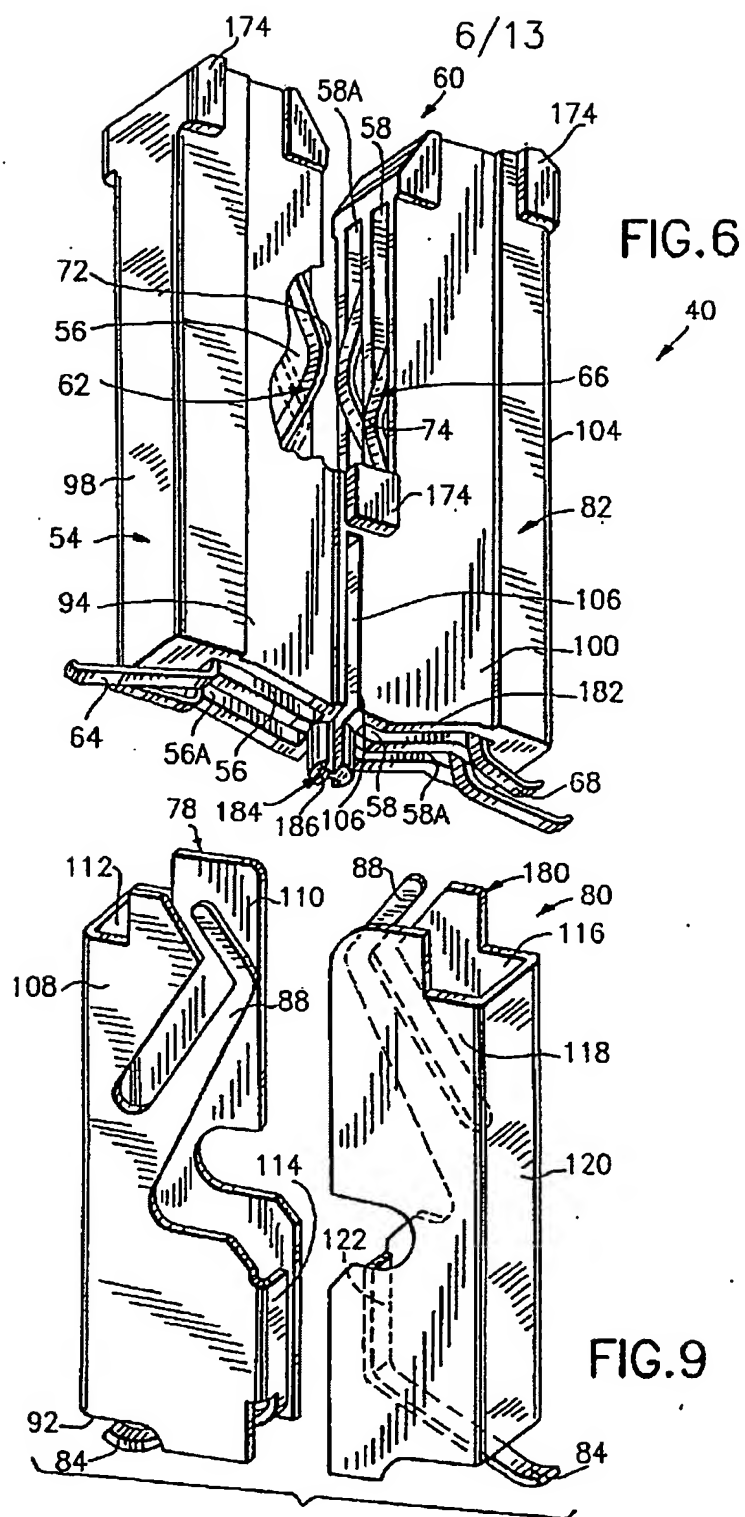


FIG.4

FIG.5





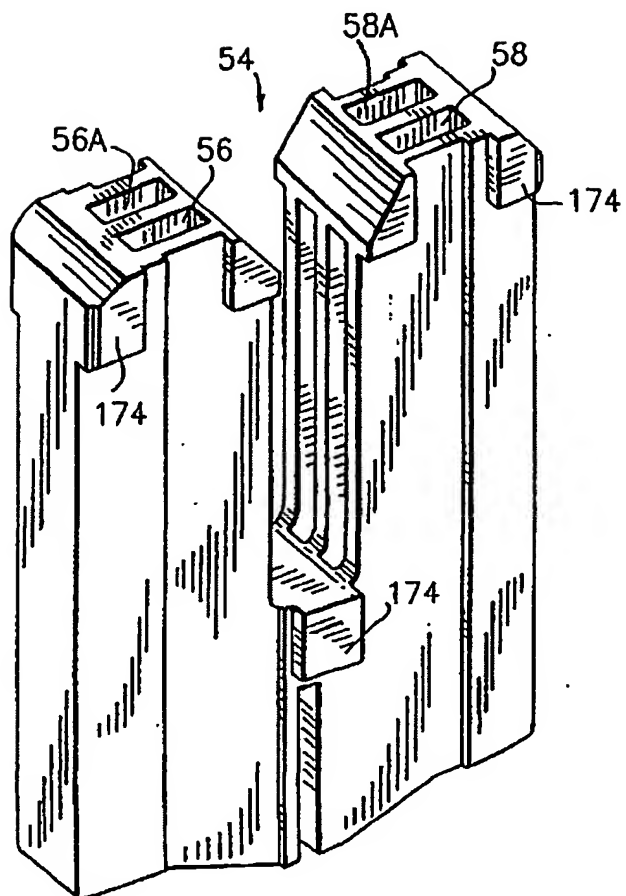
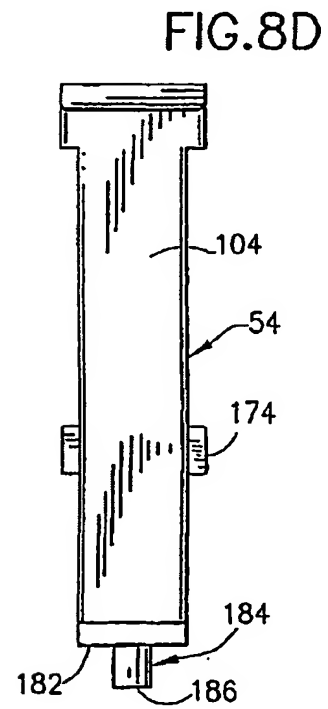
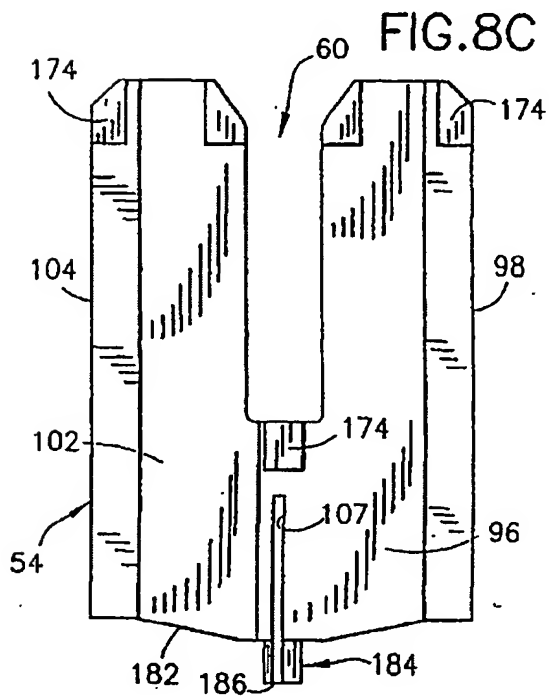
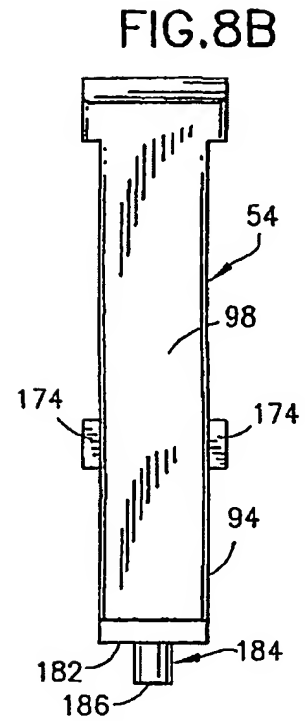
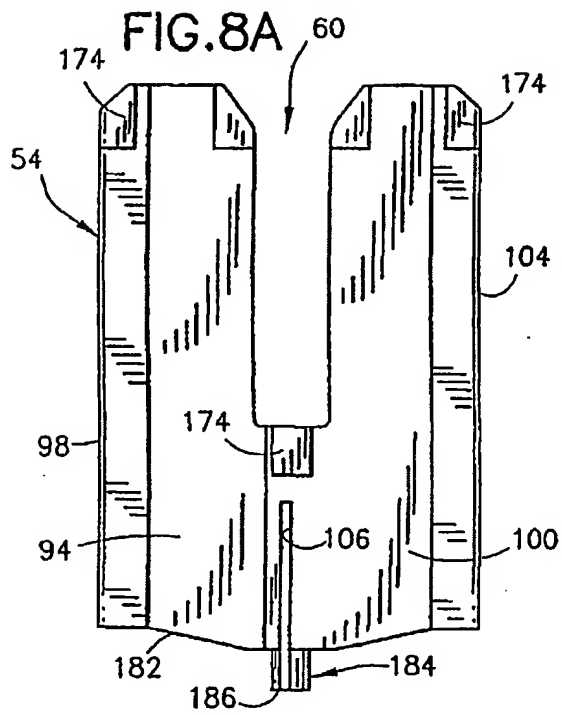


FIG. 7





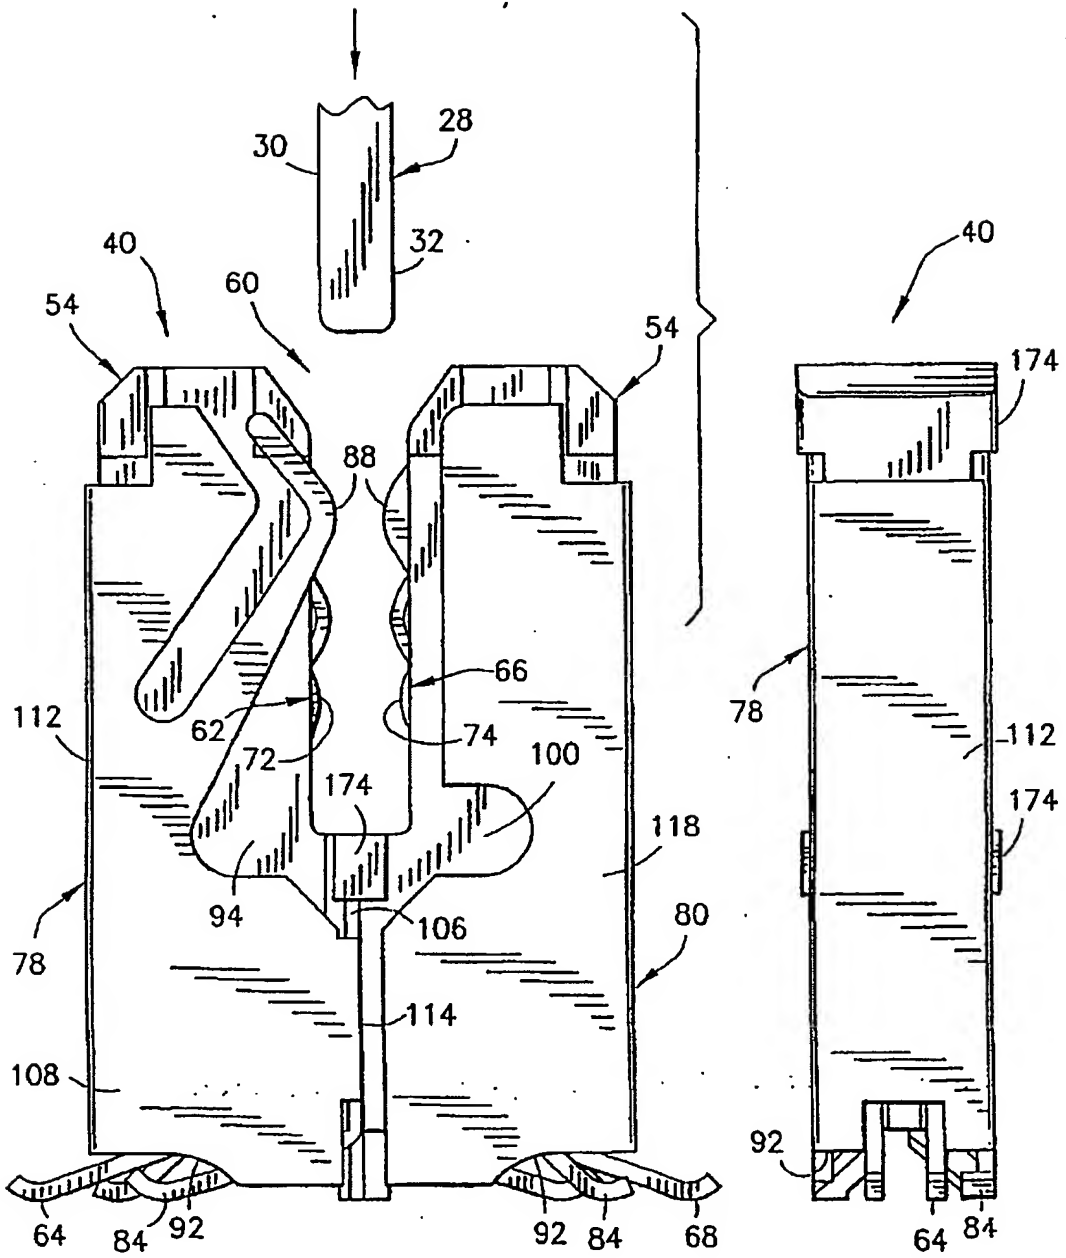


FIG.10

FIG.11

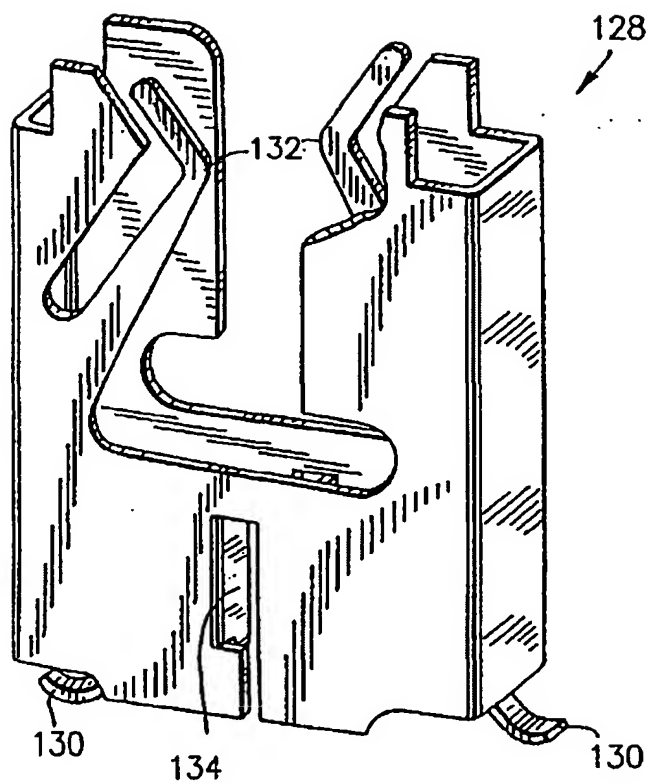


FIG.12

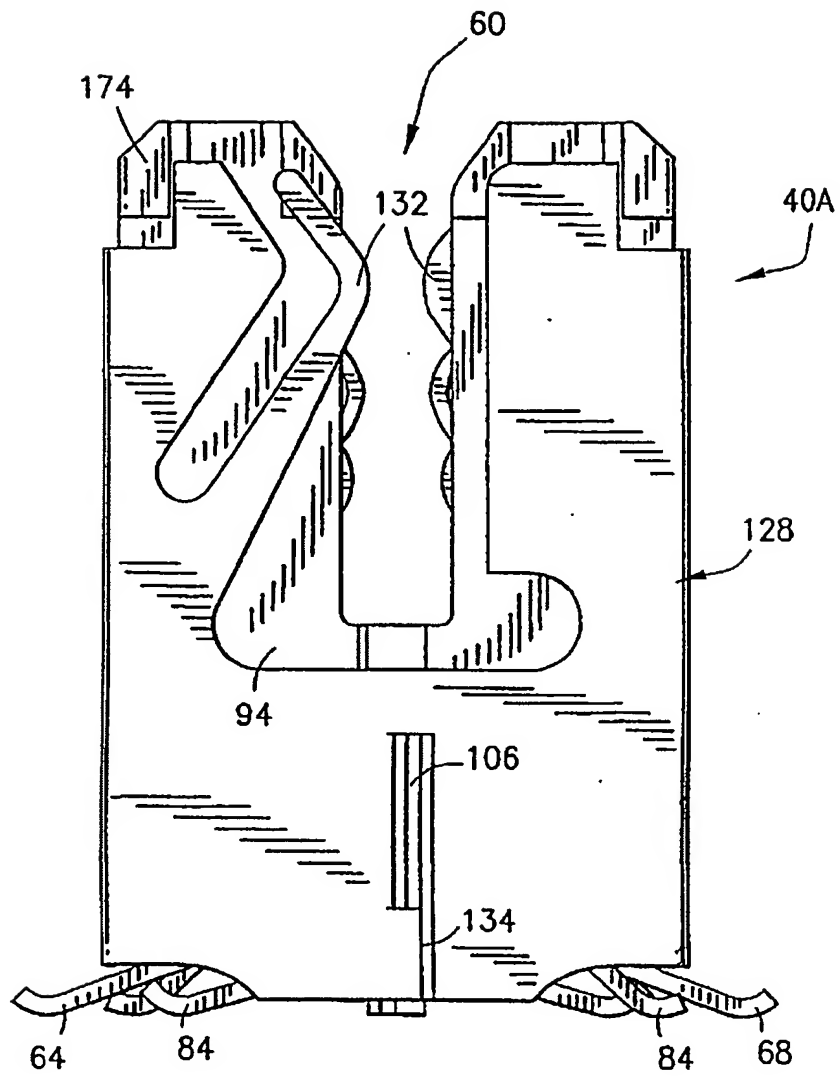


FIG.13

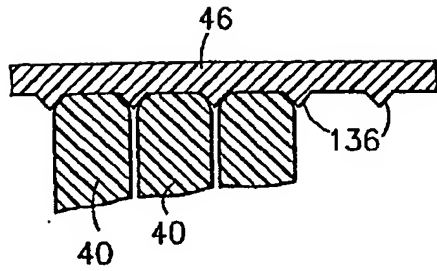


FIG. 14

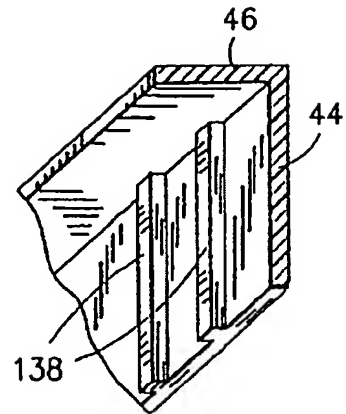


FIG. 15

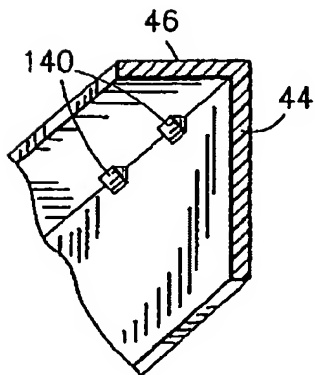


FIG. 16

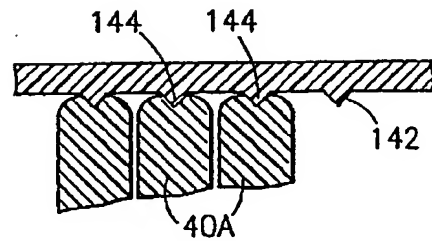


FIG. 17

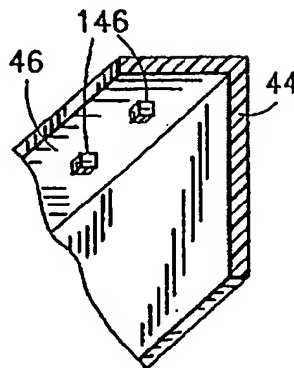


FIG. 18

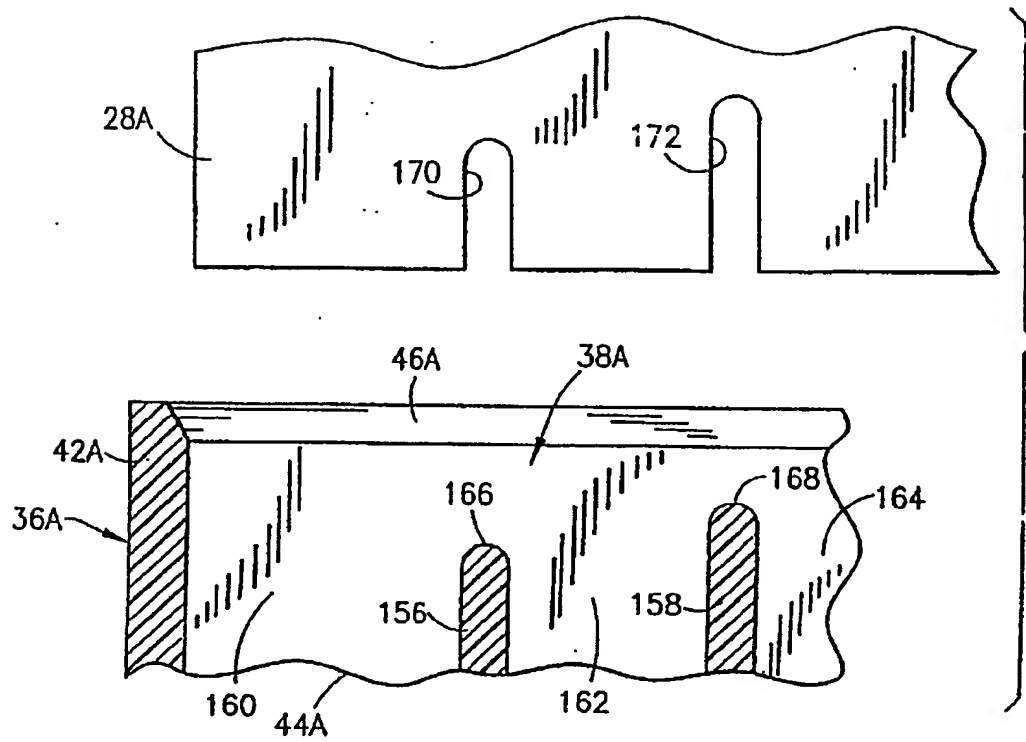


FIG. 19



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 113 530 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
21.05.2003 Bulletin 2003/21

(51) Int Cl.7: H01R 12/18

(43) Date of publication A2:  
04.07.2001 Bulletin 2001/27

(21) Application number: 00128102.1

(22) Date of filing: 21.12.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Salamone, Joseph R.  
Contoocook, New Hampshire 03229 (US)  
• Letourneau, Guy L.  
Warren, Oregon 97053 (US)

(30) Priority: 29.12.1999 US 474818


(74) Representative: Beetz & Partner Patentanwälte  
Steinsdorfstrasse 10  
80538 München (DE)

(71) Applicant: BERG ELECTRONICS  
MANUFACTURING B.V.  
5202 CB s'-Hertogenbosch (NL)

(54) High speed card edge connectors

(57) A card edge connector includes an elongated longitudinally extending outer frame (36) defining a reception region (38) adapted to receive a plurality of chiclet modules (40, 40A) including contact members (34) and lying in parallel laterally extending planes which, as an assembly, are positioned to connectively engage with mating contacts (22). Each chiclet module (40, 40A) includes an insulative housing (54) having first and second spaced generally parallel elongated passages therein and a card receiving recess (60) for reception therein between the first and second passages (58, 58A) of a planar card (28, 28A) having opposed surfaces (30, 32) with conductive contact members (34) thereon. First and second contacts (62, 66) are received, respectively, in the first and second passages (58, 58A). Each has a first contact surface (64) positioned, respectively, for engagement with first and second of the mating contacts (22). The card receiving recesses (60) of the chiclet modules (40, 40A) as a group define a longitudinally extending card receiving slot (70). The contacts each include a second contact surface (68) projecting into the card receiving slot (70) for engagement, respectively, with second conductive contact members (34) on the planar card (28, 28A). A tubular ground shield (128) may be slidably received on the insulative housing (54) in proximate engagement with its outer peripheral surface (82). In this instance, the ground-shield includes a first integral ground contact (84) for engagement with a ground contact (86) of an external unit (26) associated with the mating contacts (22) engaged by the first con-

tact surfaces (64) of the first and second contacts (62, 66) and a second integral ground contact (88) for engagement with a ground contact surface (90) on the planar card (28, 28A) inserted into the card receiving slot (70).

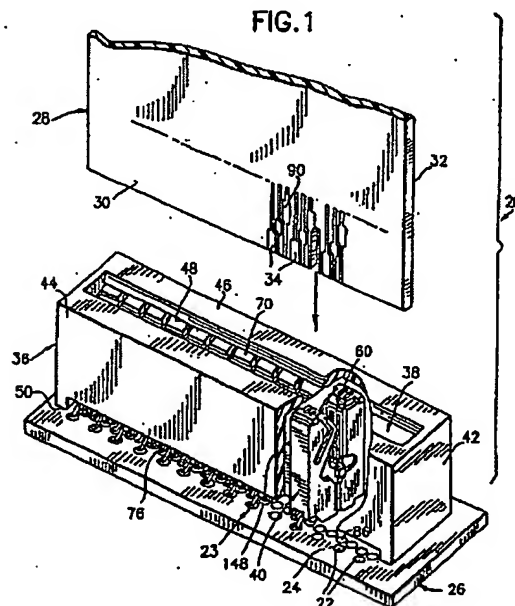

EP 1 113 530 A3





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 12 8102

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL.7)
X	EP 0 892 465 A (SIEMENS AG) 20 January 1999 (1999-01-20)	1-4	H01R12/18
Y	* column 3, line 24 - column 4, line 57; figures 1,4 *	5,6	
D.A	US 5 716 237 A (HASHIM AMID IHSAN ET AL) 10 February 1998 (1998-02-10)	2,3	
Y	US 5 993 235 A (CHEN VICTOR) 30 November 1999 (1999-11-30)	5	
Y	EP 0 356 156 A (MOLEX INC) 28 February 1990 (1990-02-28)	6	
A	US 4 663 552 A (OHMSTEDT HARRY O) 5 May 1987 (1987-05-05)	7-12	
			TECHNICAL FIELDS SEARCHED (InCL.7)
			H01R
A	US 4 556 268 A (NOSCHES ROCCO J) 3 December 1985 (1985-12-03)	1-37	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 25 March 2003	Examiner Segerberg, T
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPC FORM 1603 (03.02) (P0400)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 8102

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-03-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0892465	A	20-01-1999	DE	19730484 C1	22-10-1998
			EP	0892465 A2	20-01-1999
			JP	11074021 A	16-03-1999
			US	6206713 B1	27-03-2001
-----					
US 5716237	A	10-02-1998	AU	720162 B2	25-05-2000
			AU	2492197 A	08-01-1998
			GB	2314467 A ,B	24-12-1997
			NZ	328142 A	29-09-1999
			US	6065994 A	23-05-2000
-----					
US 5993235	A	30-11-1999	NONE		
-----					
EP 0356156	A	28-02-1990	US	4891023 A	02-01-1990
			DE	68921117 D1	23-03-1995
			DE	68921117 T2	28-09-1995
			EP	0356156 A2	28-02-1990
			JP	1809045 C	10-12-1993
			JP	2114477 A	26-04-1990
			JP	5006315 B	26-01-1993
-----					
US 4663552	A	05-05-1987	CN	87100943 A ,B	09-09-1987
			JP	1825707 C	28-02-1994
			JP	5031376 B	12-05-1993
			JP	62201037 A	04-09-1987
			KR	9102459 B1	22-04-1991
-----					
US 4556268	A	03-12-1985	AU	571617 B2	21-04-1988
			AU	3679284 A	13-06-1985
			BR	8407188 A	05-11-1985
			DE	3483968 D1	21-02-1991
			EP	0165295 A1	27-12-1985
			JP	6016432 B	02-03-1994
			JP	61500517 T	20-03-1986
			WO	8502498 A1	06-06-1985
-----					

EPO FORM P1669

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82